




50 Hz R134a											
4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
30	1 P frigorifique	(W)	148	196	255	324	406	500	610	736	879
	2 P absorbé	(W)	127	139	152	164	177	191	206	222	239
	3   absorbé	(A)	1.3	1.31	1.33	1.35	1.38	1.42	1.46	1.51	1.57
40	1 P frigorifique	(W)		170	223	285	358	443	511	653	782
	2 P absorbé	(W)		146	161	176	192	209	226	245	266
	3   absorbé	(A)		1.31	1.34	1.37	1.42	1.46	1.52	1.58	1.65
50	1 P frigorifique	(W)			189	243	307	380	466	564	676
	2 P absorbé	(W)			168	187	206	226	247	270	294
	3   absorbé	(A)			1.35	1.4	1.45	1.51	1.58	1.65	1.73
60	1 P frigorifique	(W)				202	255	316	387	470	565
	2 P absorbé	(W)				196	219	243	269	295	323
	3   absorbé	(A)				1.43	1.5	1.57	1.65	1.73	1.82

1=refrigerating capacity      2=watt input      3=current      4=condensing temperature      5=evaporating temperature

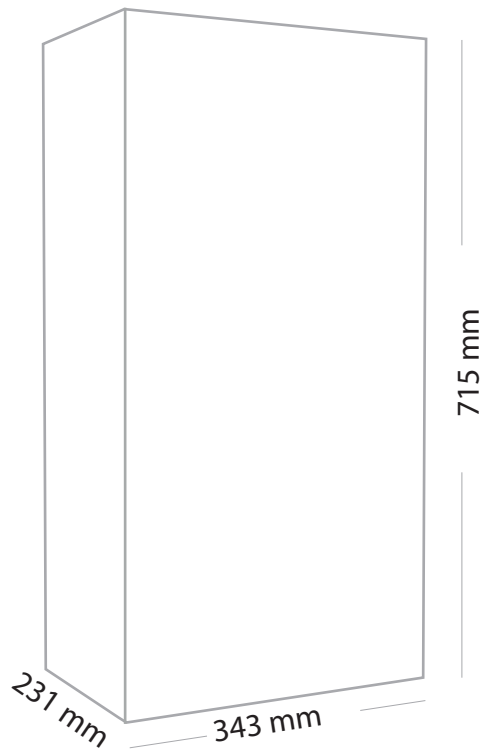

Technical Data	400	600
Cooling Capacity {L35-L35}	487W {1661BTU/h}	698W {2380 BTU/h}
Refrigerant Type	R134a	R134a
Thermostat Setting	32°C	32°C
Hysteresis	4°C	4°C
Condenser Fan Flow	190m3/h	190m3/h
Evaporator Fan Flow	190m3/h	190m3/h
Weight	17 kgs	17 kgs
Dimensions {Width*Height*Depth} mm	343 X 715 X 231	343 X 715 X 231
Operating Temperature	+7,5°C - +55°C	+7,5°C - +55°C
Corrosion Protection	Stainless Steel	
Level Implementation	Side Mount	Side Mount
IP Rating	IP 54 / IP 65	IP 54 / IP 65
Frequency	50/60 Hz	50/60 Hz
Power Load	220V- 240V	220V- 240V
Fans	Ebm Papst	Ebm Papst
Compressor	Tecumseh / Embraco	Tecumseh / Embraco