




50 Hz R134a											
4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
30	1 P frigorigue	(W)	212	283	368	472	597	747	925	1135	1380
	2 P absorbéé	(W)	183	195	205	214	221	229	239	250	265
	3 I absorbéé	(A)	2.12	2.13	2.14	2.15	2.17	2.18	2.19	2.21	2.23
40	1 P frigorigue	(W)		241	319	411	522	653	809	992	1206
	2 P absorbéé	(W)		212	230	244	257	268	279	292	306
	3 I absorbéé	(A)		2.12	2.15	2.18	2.21	2.24	2.27	2.31	2.34
50	1 P frigorigue	(W)			268	350	447	561	695	854	1040
	2 P absorbéé	(W)			241	264	284	302	318	334	351
	3 I absorbéé	(A)			2.16	2.2	2.25	2.3	2.35	2.4	2.45
60	1 P frigorigue	(W)				286	371	469	584	719	877
	2 P absorbéé	(W)				267	298	325	349	372	393
	3 I absorbéé	(A)				2.23	2.3	2.36	2.43	2.5	2.57

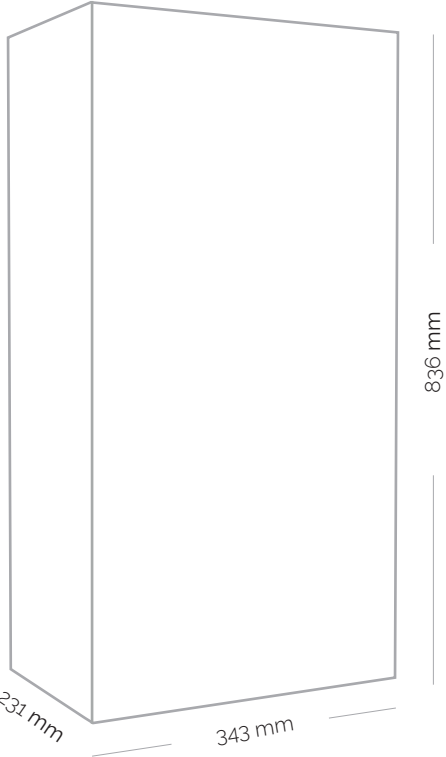

Technical Data	800	1000
Cooling Capacity [L35-L35]	800W {2729BTU/h}	1000 W {3411 BTU/h}
Refrigerant Type	R134a	R134a
Thermostat Setting	32°C	32°C
Hysteresis	4°C	4°C
Condenser Fan Flow	190m3/h	190m3/h
Evaporator Fan Flow	530m3/h	530m3/h
Weight	25kgs	25kgs
Dimensions [Width*Height*Depth] mm	340 X 836 X 231	340 X 836 X 231
Operating Temperature	+7.5°C - +55°C	+7.5°C - +55°C
Corrosion Protection		Stainless Steel
Level Implementation	Side Mount	Side Mount
IP Rating	IP 54 / IP 65	IP 54 / IP 65
Frequency	50/60 Hz	50/60 Hz
Power Load	220V- 240V	220V- 240V
Fans	Ebm Papst	Ebm Papst
Compressor	Tecumseh / Embraco	Tecumseh / Embraco