




50 Hz R134a											
4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
30	1 P frigorifique	(W)	410	566	754	982	1258	1588	1979	2441	2978
	2 P absorbéé	(W)	327	370	407	441	472	501	530	558	588
	3 l absorbéé	(A)	3.41	3.49	3.57	3.65	3.73	3.82	3.91	4	4.09
40	1 P frigorifique	(W)		467	628	831	1071	1357	1696	2096	2563
	2 P absorbéé	(W)		373	425	471	514	553	591	627	663
	3 l absorbéé	(A)		3.46	3.59	3.73	3.87	4.02	4.16	4.31	4.46
50	1 P frigorifique	(W)			492	673	883	1130	1421	1764	2165
	2 P absorbéé	(W)			424	487	546	600	651	700	748
	3 l absorbéé	(A)			3.55	3.75	3.95	4.15	4.36	4.56	4.77
60	1 P frigorifique	(W)				506	691	903	1151	1441	1781
	2 P absorbéé	(W)				478	557	631	700	766	830
	3 l absorbéé	(A)				3.71	3.97	4.23	4.49	4.75	5.02

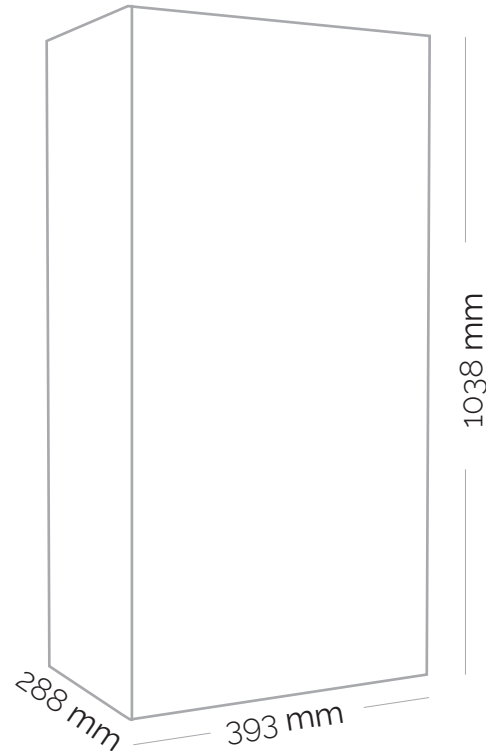

Technical Data	1800	2200
Cooling Capacity (L35-L35)	1800W (6140 BTU/h)	2200 W (7504 BTU/h)
Refrigerant Type	R134a	R134a
Thermostat Setting	32°C	32°C
Hysteresis	4°C	4°C
Condenser Fan Flow	530m3/h	530m3/h
Evaporator Fan Flow	1150 m³/h	1150 m³/h
Weight	45 kg	45 kg
Dimensions (Width*Height*Depth) mm	393 x 1038 x 245	393 x 1038 x 245
Operating Temperature	+7.5°C - +55°C	+7.5°C - +55°C
Corrosion Protection		Stainles Steel
Level Implementation	Side Mount	Side Mount
IP Rating	IP 54 / IP 65	IP 54 / IP 65
Frequency	50/60 Hz	50/60 Hz
Power Load	220V- 240V	220V- 240V
Fans	Ebm Papst	Ebm Papst
Compressor	Tecumseh / Embraco	Tecumseh / Embraco