


50 Hz R404A											
4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
<b>30</b>	1 P frigorifique	(W)	1764	2268	2853	3530	4312	5209	6234	7398	8713
	2 P absorbée	(W)	1003	1122	1238	1350	1459	1565	1668	1769	1867
	3 l absorbée	(A)	2.74	2.86	2.98	3.1	3.23	3.36	3.49	3.63	3.77
<b>40</b>	1 P frigorifique	(W)	1849	2369	2958	3626	4385	5248	6225	7328	
	2 P absorbée	(W)	1199	1334	1466	1592	1715	1834	1949	2061	
	3 l absorbée	(A)	2.88	3.05	3.22	3.39	3.57	3.75	3.93	4.12	
<b>50</b>	1 P frigorifique	(W)			1864	2366	2922	3545	4246	5038	5931
	2 P absorbée	(W)			1412	1575	1732	1884	2030	2172	2309
	3 l absorbée	(A)			3.16	3.37	3.59	3.82	4.05	4.28	4.51
<b>60</b>	1 P frigorifique	(W)				1749	2195	2683	3225	3833	4518
	2 P absorbée	(W)				1665	1854	2047	2234	2415	2589
	3 l absorbée	(A)				3.57	3.84	4.11	4.39	4.67	4.95

50 Hz R407C											
4 T condensation	5 T évaporation	(°C)	-25	-20	-15	-10	-5	0	5	10	15
<b>30</b>	1 P frigorifique	(W)	1098	1622	2276	3082	4060	5232	6619	8241	10120
	2 P absorbée	(W)	943	1084	1206	1316	1418	1518	1620	1731	1854
	3 l absorbée	(A)	2.96	3.02	3.09	3.16	3.24	3.32	3.4	3.49	3.59
<b>40</b>	1 P frigorifique	(W)		1254	1830	2540	3406	4450	5691	7151	8851
	2 P absorbée	(W)		1085	1261	1416	1553	1679	1798	1916	2038
	3 l absorbée	(A)		2.98	3.1	3.23	3.36	3.5	3.64	3.79	3.95
<b>50</b>	1 P frigorifique	(W)				2001	2742	3644	4726	6011	7519
	2 P absorbée	(W)				1448	1647	1825	1987	2139	2284
	3 l absorbée	(A)				3.27	3.46	3.66	3.86	4.07	4.28
<b>60</b>	1 P frigorifique	(W)						2851	3762	4858	6161
	2 P absorbée	(W)						1906	2138	2349	2545
	3 l absorbée	(A)						3.79	4.05	4.31	4.58

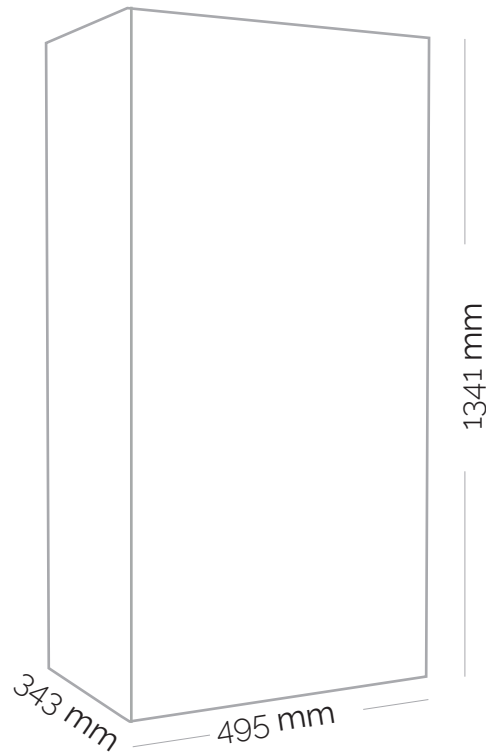

### Technical Data

	5000	5800
Cooling Capacity [L35-L35]	5000W (17055 BTU/h)	5800 W (19783 BTU/h)
Refrigerant Type	R134a	R134a
Thermostat Setting	32°C	32°C
Hysteresis	4°C	4°C
Condenser Fan Flow	1460 m <sup>3</sup> /h	1460 m <sup>3</sup> /h
Evaporator Fan Flow	1750 m <sup>3</sup> /h	1750 m <sup>3</sup> /h
Weight	72 kgs	75 kgs
Dimensions (Width*Height*Depth) mm	495 x 1341 x 343	495 x 1341 x 343
Operating Temperature	+7.5°C - +55°C	+7.5°C - +55°C
Corrosion Protection	Stainless Steel	
Level Implementation	Side Mount	Side Mount
IP Rating	IP 54 / IP 65	IP 54 / IP 65
Frequency	50/60 Hz	50/60 Hz
Power Load	380 V - 400 V	380 V - 400 V
Fans	Ebm Papst	Ebm Papst
Compressor	Tecumseh / Embraco	Tecumseh / Embraco